

GG I would like to pass on our gratitude for the work that Harlequin have done on the project. The team's tireless commitment, sheer graft and willingness to work with us is greatly appreciated.

David Reeve Technical Manager The Royal & Derngate Theatre is a mult-purpose space which can be configured for a variety of performances. Harlequin's stage refurbishment project was the first restoration undertaken since 2005 when the theatre was first re-developed.

Theatre

## Project highlights

Name:	Royal & Derngate Theatre
Location:	Northampton
Project Type:	Theatre stage refurbishment
Building Type:	Theatre auditorium
Product Types:	Harlequin Stage System / Harlequin Standfast
Product Timescale:	3 weeks





Case Study
Royal & Derngate
Theatre

## The requirement


Complete stage refurbishment and new stage surface

## The solution

A comprehensive multi-layered Harlequin Stage System. Harlequin fitted new battens to strengthen the stage over which a further double-layer of wood ply was installed. The stage surface was finished with a black Harlequin Standfast vinyl performance floor.

The complete refurbishment project covered the entire stage area incorporating wings, lifts, orchestra pit and retractable removable seating.

## Cross section of the Harlequin Stage System

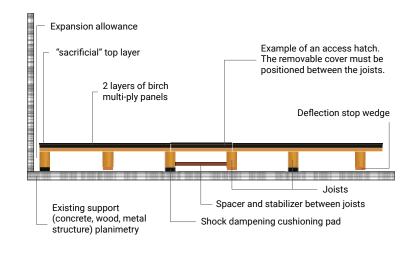



If you would like further information, advice and samples please contact us on +44(0) 1892 514 888 or enquiries@harlequinfloors.com

