





Not to scale

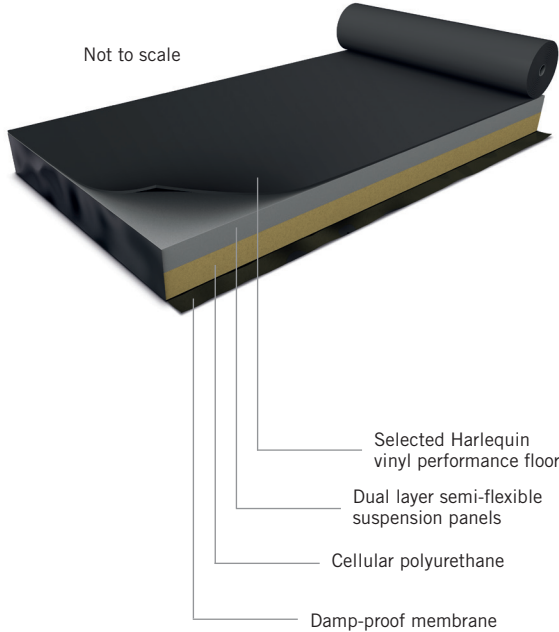

Selected Harlequin vinyl performance floor  
Dual layer semi-flexible suspension panels  
Cellular polyurethane  
Damp-proof membrane

Not to scale

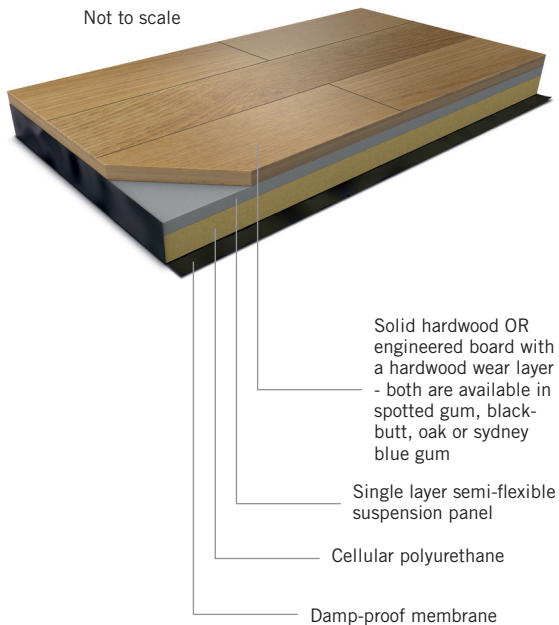

Solid hardwood OR engineered board with a hardwood wear layer - both are available in spotted gum, blackbutt, oak or sydney blue gum  
Single layer semi-flexible suspension panel  
Cellular polyurethane  
Damp-proof membrane

Australian Harlequin Pty Ltd  
Unit 1, 47 Prime Drive  
Seven Hills, NSW 2147  
Australia

Tel: +61 (2) 9620 7770  
Fax: +61 (2) 9620 7771

www.harlequinfloors.com  
auscontact@harlequinfloors.com

SYDNEY  
LONDON  
LUXEMBOURG  
BERLIN  
PARIS  
MADRID  
LOS ANGELES  
PHILADELPHIA  
FORT WORTH  
HONG KONG

# Harlequin Activity™

**Harlequin Activity** is a permanently installed sprung floor system, based on the well-established 'triple sandwich' construction originated by Harlequin over 30 years ago. It's a fully-floating system with no fixings to the sub-floor and can be laid on any reasonably smooth and flat surface without prior preparation.

**Harlequin Activity** is shock-damped to avoid a 'trampoline' effect and provides area and point elasticity to offer identical characteristics across the whole floor. It is an 'industry standard' choice with many hundreds of installations worldwide, effectively reducing injuries to both teachers and performers.

**Harlequin Activity** is installed by our own highly-skilled technical team and all work is fully guaranteed. Different surface options include:

- A Harlequin vinyl performance floor, selected from our range
- Solid hardwood - in spotted gum, blackbutt, oak or sydney blue gum
- Engineered board with a hardwood wear layer - in spotted gum, blackbutt, oak or sydney blue gum.

If a Harlequin vinyl performance floor is chosen, a colour matched composite edging profile will be installed around the finished edges. If solid hardwood or engineered board is chosen, the skirting will be 'optional'.

## Specification guide

<b>Permanent or Portable</b>	Permanent
<b>Minimum floor thickness (before inclusion of chosen finish)</b>	46mm
<b>Minimum floor weight (before inclusion of chosen finish)</b>	14.1kg/m <sup>2</sup>
<b>Testing standards</b>	DIN 18032-2
<b>Average shock absorption</b>	59.6%
<b>Maximum point load (BS EN 1195)</b>	549kg
<b>Area deflection</b>	7.2%
<b>Rolling load</b>	>1500N
<b>Vertical deformation</b>	3.8mm

## Harlequin's sprung floor application guide

In addition to Harlequin Activity, we also produce a small range of other sprung floors, which are listed below.

✓ = We recommend.

	Allegro	Cascade	Fiesta	FreeStyle	Hi-Shine	Marine	Reversible	Showfloor	Standfast	Studio	Solid hardwood	Engineered board
<b>Activity</b>		✓	✓	✓		✓			✓	✓	✓	✓
<b>Liberty (permanent)</b>		✓	✓	✓					✓	✓		
<b>Liberty (portable)</b>		✓			✓		✓	✓		✓		
<b>Vitality</b>		✓	✓	✓			✓		✓	✓		
<b>WoodSpring</b>		✓	✓	✓		✓			✓	✓	✓	✓

**If you would like further information, advice and/or samples then please contact us.**