


# Harlequin Tape

## High Performance Clear

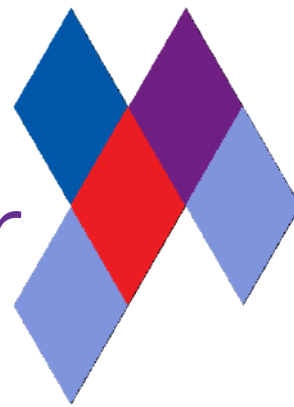

Harlequin High Performance clear tape is a polythene tape with exceptional clarity once applied. It has a thin, low-profile design and a matt, non-reflective surface making the tape barely visible in use. It is suitable for use when taping the topside of a Harlequin vinyl floor and a Harlequin printed vinyl floor.

The open side gives good adhesion to a wide variety of clean dry surfaces and enables easy-peel removal without damaging the floor and leaving no residue.\*

### Clear

- Easy peel
- Matt finish
- Durable and abrasion resistant
- Water resistant
- UV resistant
- Fully recyclable

\* Some surfaces can cause the adhesive to transfer, always test on a small area first.

### Specification Guide

Roll Width	50mm
Roll Length	33m
Thickness	0.11mm
Product Type	Polythene
Adhesive Type	Dispersion acrylic
Adhesion to Steel	1.3 N/cm
Breaking Load	25 N/cm
Elongation	300%
Service Temperature	-40°C to + 60°C
RoHS Compliant	Yes
Colours Available	Clear



If you would like further information or advice please contact us on +61 (2) 9620 7770 or email [auscontact@harlequinfloors.com](mailto:auscontact@harlequinfloors.com).

The Company reserves the right to make any variation in design or construction of the material described. Harlequin ® is a registered trademark of British Harlequin plc. © Harlequin Floors 08/2024



**HARLEQUIN**  
[www.harlequinfloors.com](http://www.harlequinfloors.com)

LONDON ♦ LUXEMBOURG ♦ BERLIN ♦ MADRID ♦ PARIS ♦ LIEGE ♦ PHILADELPHIA ♦ LOS ANGELES ♦ FORT WORTH ♦ SYDNEY ♦ HONG KONG ♦ TOKYO